


Vibro-mini & mini 2


RUBBER SUPPORT FOR LIGHT WEIGHTS



mini

Vibro-mini rubber anti-vibration support is a low cost solution for vibration problems caused by low weight machines. It is a great solution for low axial loads. Due to its pionner design, **Vibro-mini** provides a greater deflection with load. It can be anchored into the floor, suspended on the ceiling through anchor rods or even be placed on a metal base with a passing through screw of M8 mm. This screw does not create any sound bridge due to its innovative design. The passing through screw prevents the machinery from falling in the event of elastic part destruction. (Fail Safe)


Vibro-mini can be used as machinery antivibration support, suspension of machinery (air condition units, ventilators, etc), suspensions of gypsumboard ceilings etc.



mini 2

Selection Table

TYPE (Color Code)	MAX LOAD (daN)	Natural Frequency (Hz)
Vibro-mini.20	20	15
Vibro-mini.50	50	15

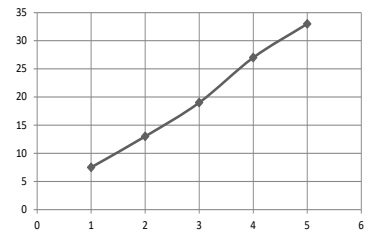

Deflection (mm)



Design and Production according to Quality Management System ISO 9001.2008 & Environmental Management System ISO 14001.2004